



542605

(43) International Publication Date
5 August 2004 (05.08.2004)


PCT

(10) International Publication Number
WO 2004/065192 A1

- (51) International Patent Classification⁷: **B62B 7/08**, 9/10
(21) International Application Number: PCT/IB2004/000440
(22) International Filing Date: 16 January 2004 (16.01.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
03/00528 17 January 2003 (17.01.2003) FR
(71) Applicant (for all designated States except US): **GH SOLUTIONS** [FR/FR]; 7, rue de Saint-Senoch, F-75017 Paris (FR).
(72) Inventor; and
(75) Inventor/Applicant (for US only): **HENRY, Gilles** [FR/FR]; 4, rue Nationale, F-92100 Boulogne-Billancourt (FR).
(74) Agents: **BREESÉ, Pierre** et al.; Breesé-Majerowicz, 3 Avenue de l'Opéra, Paris F-75001 (FR).
(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: **COLLAPSIBLE SEAT WITH A COLLAPSIBLE PROTECTIVE STRUCTURE**

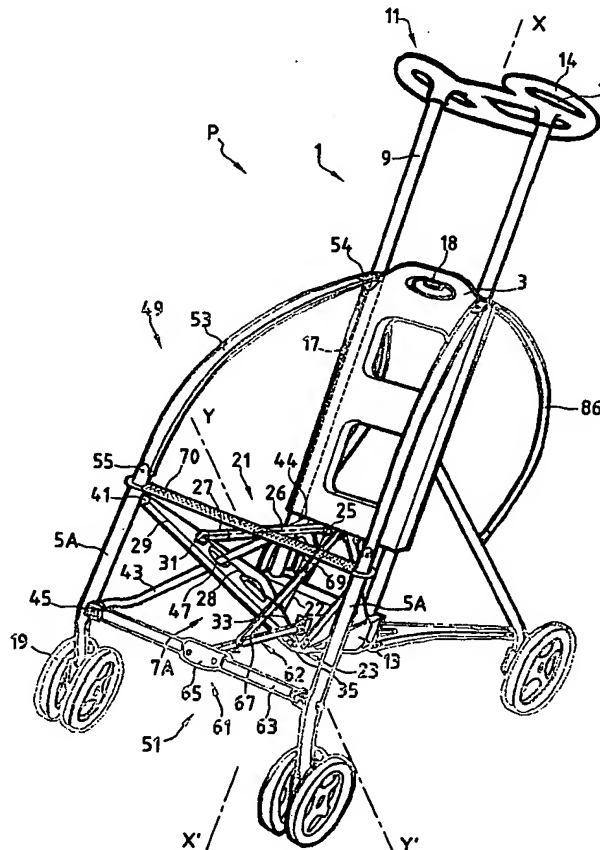

(57) Abstract: This seat comprises an upright (1) and a jointed structure (7A) for the unfolding of the seat. It further comprises support means (49) for the collapsible protective structure (85, 87), comprising at least one support unit (53) that is elastically bendable through buckling, this unit being jointed (i) to a first point (53) is adapted so as to take a bent buckling position when the seat is unfolded. Application to the protective structures for children pushchairs.